

Ordering Information:

Rogers' high frequency laminates can be purchased by contacting a Rogers Customer Service Representative at (480) 961-1382 or one of our international offices listed below.

To ensure that you receive the material for your application, please include order information for each of the categories listed below. For more detailed product information, refer to the charts in this product selector guide.

GRADE:

Laminates - RT/duroid® 5870, 5880, 6002, 6202, 6006, 6010LM, ULTRALAM® 2000, ULTRALAM 3000, TMM® 3,4,6,10, and 10i, RO3003™, RO3035™, RO3203™, RO3006™, RO3206™ RO3010™, RO3210™, RO4003C™, and RO4350B™ high frequency laminates.

Bonding Film -3001 Prepreg - RO4403™, RO4450B™ and RO4450F™

THICKNESS AND TOLERANCE:

Laminate thickness is normally specified as the dielectric thickness without copper cladding. Custom tolerances are available on RT/duroid laminates upon request.

TYPE OF FOIL CLADDING:

¼, ½, 1, 2 oz. electrodeposited copper foil, ½, 1, 2 oz. rolled copper foil, TMM, RO3000 and RO4000 series laminates are not supplied with ¼ oz. electrodeposited or rolled copper foil.

Some material grades may be supplied unclad. Call Rogers Customer Service Representatives for unclad options.

Thick aluminum, copper and brass claddings are available on Rogers RT/duroid laminates. Thick aluminum and brass claddings are available on most TMM laminates. Thick metal cladding is not available on RO4000 laminates. Thick aluminum, copper, and brass claddings are also available in a range of thicknesses and thickness tolerances. Other thick metal backings are available upon request.

SPECIFICATION REQUIREMENTS:

Standard specifications are Rogers' material specifications. Certificates of conformance are available.

All other requirements must be identified at the time the order is placed. If special testing or data generation is required, additional costs may be incurred.

Standard Thickness, Tolerance and Panel Size in (mm)		
Product	Standard Dielectric Thickness	Standard Panel Sizes
RO3003™ RO3035™ *RO3203™ <small>*not available in 0.005" (0.127mm)</small>	0.005" (0.127mm) ± 0.0005" 0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.001" 0.030" (0.762mm) ± 0.0015" 0.060" (1.524mm) ± 0.003"	RO3003 12"X18" (305mm X 457mm) 24"X18" (610mm X 457mm) RO3203, RO3035 18"X12" (457mm X 305mm) 18"X24" (457mm X 610mm) 18"X36" (457mm X 915mm) 18"X48" (457mm X 1.219m)
RO3006™ RO3010™ *RO3206™ *RO3210™ <small>*not available in 0.005" (0.127mm) and 0.010" (0.254mm)</small>	0.005" (0.127mm) ± 0.0005" 0.010" (0.254mm) ± 0.0007" 0.025" (0.625mm) ± 0.001" 0.050" (1.270mm) ± 0.002"	18"X12" (457mm X 305mm) 18"X24" (457mm X 610mm) 18"X36" (457mm X 915mm) 18"X48" (457mm X 1.219m)
RO4003C™	0.008" (0.203mm) ± 0.001" 0.012" (0.305mm) ± 0.001" 0.016" (0.406mm) ± 0.0015" 0.020" (0.508mm) ± 0.0015" 0.032" (0.813mm) ± 0.002" 0.060" (1.524mm) ± 0.004"	12"X18" (305mm X 457mm) 24"X18" (610mm X 457mm)
RO4350B™	0.0040" (0.101mm) ± 0.0007" 0.0066" (0.168mm) ± 0.0007" 0.0100" (0.254mm) ± 0.001" 0.0133" (0.338mm) ± 0.0015" 0.0166" (0.422mm) ± 0.0015" 0.0200" (0.508mm) ± 0.0015" 0.0300" (0.762mm) ± 0.002" 0.0600" (1.524mm) ± 0.004"	12"X18" (305mm X 457mm) 24"X18" (610mm X 457mm)
RT/duroid®5870 RT/duroid 5880	0.005" (0.127mm) ± 0.0005" 0.010" (0.254mm) ± 0.0007" 0.021" (0.508mm) ± 0.001" 0.031" (0.787mm) ± 0.001" 0.062" (1.570mm) ± 0.002" 0.125" (3.170mm) ± 0.004"	18"X12" (457mm X 305mm) 18"X24" (457mm X 610mm) 18"X36" (457mm X 915mm) 18"X48" (457mm X 1.219m)
RT/duroid 6002 RT/duroid 6202	0.010" (0.254mm) ± 0.0007" 0.020" (0.508mm) ± 0.001" 0.030" (0.762mm) ± 0.001" 0.060" (1.524mm) ± 0.002"	18"X12" (457mm X 305mm) 18"X24" (457mm X 610mm) 18"X36" (457mm X 915mm) 18"X48" (457mm X 1.219m)
RT/duroid 6006 RT/duroid 6010LM	0.005" (0.127mm) ± 0.0005" 0.010" (0.254mm) ± 0.0007" 0.025" (0.625mm) ± 0.001" 0.050" (1.270mm) ± 0.002" 0.075" (1.905mm) ± 0.004" 0.100" (2.540mm) ± 0.005"	18"X12" (457mm X 305mm) not available in 0.010" (0.254mm) 18"X24" (457 X 610mm) not available in 0.010" (0.254mm) 10"X10" (254mm X 254mm) 10"X20" (254mm X 508mm) 20"X20" (508mm X 508mm)
TMM®3 TMM 4	0.015" (0.381mm) ± 0.0015" 0.020" (0.508mm) ± 0.0015" 0.030" (0.762mm) ± 0.0015" 0.060" (1.524mm) ± 0.0015" 0.125" (3.175mm) ± 0.0015"	18"X12" (457mm X 305mm) 18"X24" (457mm X 610mm)
TMM 6 TMM 10 TMM 10i	0.015" (0.381mm) ± 0.0015" 0.025" (0.625mm) ± 0.0015" 0.050" (1.270mm) ± 0.0015" 0.075" (1.905mm) ± 0.0015" 0.100" (2.540mm) ± 0.0015"	18"X12" (457mm X 305mm) 18"X24" (457mm X 610mm)
ULTRALAM® 3000	0.001" (0.025mm) 0.002" (0.051mm) 0.004" (0.101mm)	18"X12" (457mm X 305mm) 18"X24" (457mm X 610mm)

Other thicknesses and panel sizes may be available. Contact customer service for more information.

CONTACT INFORMATION:

USA: Rogers Advanced Circuit Materials, ISO 9002 certified
Belgium: Rogers NV - Gent
Japan: Rogers Japan Inc.
Taiwan: Rogers Taiwan Inc.
Korea: Rogers Korea Inc.
Singapore: Rogers Technologies Singapore Inc.
China: Rogers (Shanghai) International Trading Co., Ltd

Tel: 480-961-1382 Fax: 480-961-4533
Tel: 32-9-2353611 Fax: 32-9-2353658
Tel: 81-3-5200-2700 Fax: 81-3-5200-0571
Tel: 886-2-86609056 Fax: 886-2-86609057
Tel: 82-31-716-6112 Fax: 82-31-716-6208
Tel: 65-747-3521 Fax: 65-747-7425
Tel: 86-21-63916088 Fax: 86-21-63915060

The information contained in this product selector guide is intended to assist you in designing with Rogers' laminates. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose. The user should determine the suitability of Rogers' circuit materials for each application.


These commodities, technology and software are exported from the United States in accordance with the Export Administration regulations. Diversion contrary to U.S. law prohibited.

RT/duroid, ULTRALAM, TMM, RO3000, and RO4000 are licensed trademarks of Rogers Corporation. The world runs better with Rogers, and the Rogers' logo are licensed trademarks of Rogers Corporation.
© 1987, 1991, 1994, 1995, 1999, 2001, 2002, 2004, 2005, 2007, 2008 All Rights Reserved. Printed in USA.
Revised 11/2008 0834-1108-10.00N Publication #92-601



Advanced Circuit Materials

High Frequency Laminates Product Selector Guide

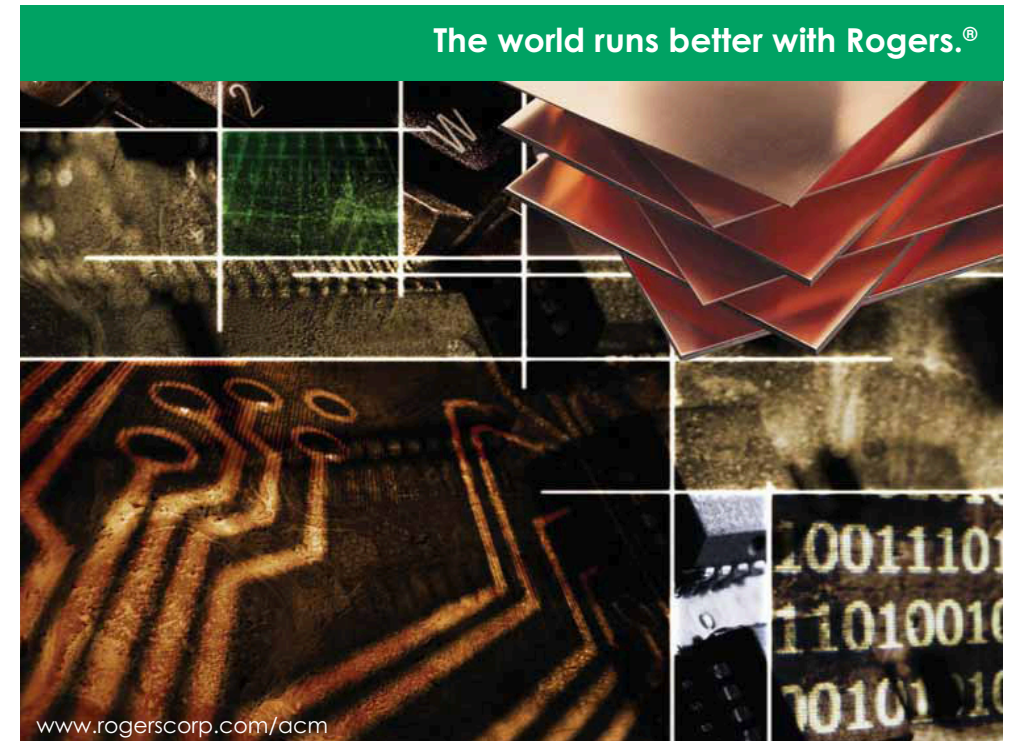

The world runs better with Rogers.®

www.rogerscorp.com/acm

High Frequency Laminate Properties

Product	Composition	Dielectric ⁽¹⁾ Constant ϵ_r @ 10 GHz (Typical)		Dissipation ⁽¹⁾ Factor TAN δ @ 10 GHz (Typical)		Thermal ⁽²⁾ Coefficient of ϵ_r -50°C to 150°C ppm/°C (Typical)		Volume Resistivity Mohm cm (Typical)	Surface Resistivity Mohm (Typical)	Youngs Modulus ⁽³⁾ kpsi (MPa) (Typical)			Moisture ⁽⁴⁾ Absorption D24/23 % (Typical)	Thermal ⁽⁵⁾ Conductivity W/m ² /K (Typical)	Coefficient of Thermal Expansion ⁽⁶⁾ 0° - 100°C ppm/°C (Typical)			Density, gm/cm ³ (Typical)	Peel Strength 1 oz (35 μ m) EDC Foil lbs/in. (N/mm) (Typical)	Flammability Rating UL	Lead-Free Process Capability	Halogen Free	
										X	Y	Z			X	Y	Z						
										-50° to 10°C		-34			10°C to 150°C		-11						
RO3003™	PTFE Ceramic	[7] 3.00 ± 0.04		0.0013		13		10 ⁷	10 ⁷	300 (2,068)	300 (2,068)	167 (1,151)	<0.1	0.50	17	17	24	2.1	17.6 (3.1)	94 V-0	YES		
RO3006™	PTFE Ceramic	6.15 ± 0.15		0.0020		-160		10 ⁸	10 ⁸	300 (2,068)	300 (2,068)	211 (1,455)	<0.1	0.61	17	17	24	2.6	12.2 (2.1)	94 V-0	YES		
RO3010™	PTFE Ceramic	10.2 ± 0.30		0.0023		-280		10 ⁸	10 ⁸	300 (2,068)	300 (2,068)	244 (1,682)	<0.1	0.66	17	17	24	3.0	13.4 (2.4)	94 V-0	YES		
RO3035™	PTFE Ceramic	3.50 ± 0.05		0.0017				10 ⁷	10 ⁷	300 (2,068)	300 (2,068)	181 (1,248)	<0.1	0.50	17	17	24	2.1	9.1 (1.6)	94 V-0	YES		
RO3203™	PTFE Ceramic Reinforced Woven Glass	[7] 3.02 ± 0.04		0.0016		13		10 ⁷	10 ⁷	140 (965)	140 (965)	129 (889)	<0.1	0.50	13	13	58	2.1	10 (1.7)	94 V-0	YES		
RO3204™	PTFE Ceramic Reinforced Woven Glass	6.15 ± 0.15		0.0027		-212		10 ⁷	10 ⁷	140 (965)	140 (965)	192 (1,324)	<0.1	0.63	13	13	34	2.7	7 (1.30)	94 V-0	YES		
RO3210™	PTFE Ceramic Reinforced Woven Glass	10.2 ± 0.50		0.0027		-459		10 ⁴	10 ⁴	140 (965)	140 (965)	223 (1,538)	<0.1	0.81	13	13	34	3.0	13 (2.4)	94 V-0	YES		
RO4003C™	Hydrocarbon Ceramic	Process Design	[8] 3.38 ± 0.05 3.55	0.0027		+40		1.7 X 10 ¹⁰	4.2 X 10 ⁹	3,700 (25,510)	3,900 (26,889)	841 (5,800)	0.06	0.64	11	14	46	1.8	6.0 (1.1)	N/A	YES	YES	
RO4350B™	Hydrocarbon Ceramic	Process Design	3.48 ± 0.05 3.66	0.0037		+50		1.2 X 10 ⁹	5.7 X 10 ⁸	TBD	1,644 (11,473)	798 (5,500)	0.06	0.62	14	16	35	1.9	5.2 (0.9)	94 V-0	YES		
RO4450B™	Hydrocarbon Ceramic Prepreg	Thickness 0.0036"	3.30 ± 0.05	0.0040		-50 to 60°C		21	>2.5 X 10 ¹⁰	1.9 X 10 ⁸	N/A	N/A	N/A	0.05	0.60	19	17	50	1.86	N/A	94V-0	YES	
**RO4450F™	Hydrocarbon Ceramic Prepreg	0.004"	3.54 ± 0.05	0.0040		60 to 150°C		-18	TBD	TBD	TBD	TBD	0.09	0.65	19	17	50	1.83	N/A	94V-0	YES		
RT/duraid® 5870	PTFE Glass Fiber	2.33 ± 0.02		0.0012		-115		2 X 10 ⁷	2 X 10 ⁸	189 (1,340)	185 (1,277)	120 (828)	0.015	0.22	22	28	173	2.2	20.8 (3.7)	94V-0	YES		
RT/duraid® 5880	PTFE Glass Fiber	2.20 ± 0.02		0.0009		-125		2 X 10 ⁷	3 X 10 ⁷	156 (1,076)	125 (863)	136 (938)	0.015	0.20	31	48	237	2.2	22.8 (4.0)	94V-0	YES		
RT/duraid® 6002	PTFE Ceramic	2.94 ± 0.04		0.0012		+12		10 ⁶	10 ⁷	120 (828)	120 (828)	360* (2,482)	0.1	0.60	16	16	24	2.1	8.9 (1.6)	94V-0	YES		
RT/duraid® 6202	PTFE Ceramic Woven Glass	[9] 2.94 ± 0.04		0.0015		+13**		10 ¹⁰	10 ⁹	146 (1,007)	146 (1,007)	150 (1,035)	0.1	0.68	15	15	30	2.1	9.1 (1.6)	94V-0	YES		
RT/duraid® 6006	PTFE Ceramic	6.15 ± 0.15		0.0027		-410		2 X 10 ⁷	7 X 10 ⁷	91 (628)	75 (517)	155 (1,070)	0.05	0.48	47	34	117	2.7	14.3 (2.5)	94V-0	YES		
RT/duraid® 6010LM	PTFE Ceramic	10.2 ± 0.25		0.0023		-425		5 X 10 ⁶	5 X 10 ⁶	135 (932)	81 (559)	311 (2,146)	0.05	0.78	24	24	47	3.1	12.3 (2.1)	94V-0	YES		
TMM® 3	Hydrocarbon Ceramic	3.27 ± 0.032		0.0020		+37		3 X 10 ⁹	>9 X 10 ⁹	1,916 (13,210)	1,916 (13,210)	742 (5,116)	[4] 0.06	0.70	16	16	20	1.78	5.7 (1.0)	N/A	YES	YES	
TMM® 4	Hydrocarbon Ceramic	4.50 ± 0.045		0.0020		-15.3*		6 X 10 ⁸	1 X 10 ⁹	2,000* (13,790)	2,000* (13,790)	752 (5,185)	0.07	0.70	14	14	20	2.07	5.7 (1.0)	N/A	YES	YES	
TMM® 6	Hydrocarbon Ceramic	6.00 ± 0.08		0.0023		-11		1 X 10 ⁸	1 X 10 ⁹	2,200 (15,168)	2,200 (15,168)	736 (5,075)	0.06	0.72	16	16	20	2.37	5.7 (1.0)	N/A	YES	YES	
TMM® 10	Hydrocarbon Ceramic	9.20 ± 0.23		0.0022		-38		2 X 10 ⁸	4 X 10 ⁷	2,400 (16,547)	2,400 (16,547)	575 (3,964)	0.09	0.76	16	16	20	2.77	5.0 (0.9)	N/A	YES	YES	
TMM® 10i	Hydrocarbon Ceramic	9.80 ± 0.245		0.0020		-43		2 X 10 ⁸	4 X 10 ⁷	2,400* (16,547)	2,400* (16,547)	575* (3,964)	0.16	0.76	16	16	20	2.77	5.0 (0.9)	N/A	YES	YES	
ULTRALAM® 2000	PTFE Woven Glass	2.40 - 2.60 ± 0.04		0.0019		-100		2 X 10 ⁷	4 X 10 ⁷	1,700 (11,730)	1,300 (8,970)	N/A	0.03	0.24	15	15	200	2.2	18.0 (3.2)	94 V-0	YES		
ULTRALAM® 3000	Liquid Crystalline Polymer	2.9		0.0024		TBD		1 X 10 ¹⁰	1 X 10 ¹²	2255 (327)	2255 (327)	N/A	0.04	0.5	17	17	150	1.4	0.95 (5.2)	VTM-0	YES	YES	

Metal Claddings

Copper Foil		Surface Roughness		Tensile Strength kpsi (MPa)	Elongation %	Stress Crack Resistance	Thickness - mils
		Treated Side μ m (μ m)	Untreated Side μ m (μ m)				
¼ oz (9 μ m) Electrodeposited		70 (1.8)	15 (0.4)	N/A	N/A	Fair	0.4
½ oz (17.5 μ m) Electrodeposited		75 (1.9)	15 (0.4)	33.0 (228)	20.0	Fair	0.7
1 oz (35 μ m) Electrodeposited		95 (2.4)	15 (0.4)	30.0 (207)	28.0	Fair	1.4
2 oz (70 μ m) Electrodeposited		115 (2.9)	15 (0.4)	32.0 (221)	42.0	Fair	2.8
½ (17.5 μ m) Rolled		55 (1.4)	12 (0.3)	20.0 (138)	8.0	Excellent	0.7
1 oz (35 μ m) Rolled		55 (1.4)	12 (0.3)	22.0 (152)	13.0	Excellent	1.4
2 oz (70 μ m) Rolled		55 (1.4)	12 (0.3)	28.0 (193)	27.0	Excellent	2.8
Plates	Alloy	Machinability		Tensile Strength kpsi (MPa)	Density	Thermal Conductivity	Coefficient of Thermal Expansion ppm/°C
Aluminum	6061	Poor		20 (138)	2.7	150	24
Brass	70/30 Cartridge	Good		45 (311)	8.5	120	20
Copper	110	Fair to Good		35 (242)	8.9	390	17

Properties Notes: *Estimated, ** Preliminary Data

- Measured by IPC-TM-650 method 2.5.5.5 @ ~10 GHz, 23°C. RT/duraid 6010 materials were based on testing a 0.025" thick sheet, clad with 1 oz. electrodeposited copper foil. ϵ_r values and tolerance reported by IPC-TM-650 method 2.5.5.5 are the basis for quality acceptance, but for some products these values may be incorrect for design engineering applications, especially those in microstrip. We recommend that prototype boards of a new design be verified for electrical performance.
- Measured by IPC-TM-650 method 2.5.5.5 at ~10GHz modified.
- Young's modulus (elastic modulus), steepest region of the stress/strain curve is in tension for X and Y axes by ASTM D 638; in compression of Z axis by ASTM D695 on 12.7 X 12.7 X 25.4 mm stocked specimen.
- Testing conditions: 24 hours @ 23°C, specimens etched free of copper.
- Tested by ASTM C518.
- Tested by ASTM D3386-94. Values are average over temperature range but not necessarily linear. However for RT/duraid 6002 and TMM grades the response is essentially linear.
- The nominal dielectric constant of an 0.060" thick RO3003/RO3203 as measured by IPC-TM-2.5.5.5 will be 3.04 due to the elimination of biasing caused by air gaps in the test fixture. For further information refer to Rogers T.R. 5242.
- Dielectric constant typical value does not apply to 0.004 (0.101mm) laminates. Dielectric constant specification value of 0.004" RO4350B materials is 3.36 ± 0.05.
- Due to construction limitations, the dielectric constant of 0.010" and 0.015" thick laminates is 3.02 ± 0.04".

Typical values are a representation of an average value for the population of the property.

For specification values contact Rogers Corporation.

The information contained in this Product Selector Guide is intended to assist you in designing with Rogers' laminates. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose. The user should determine the suitability of Rogers' circuit materials for each application.